

HK G56



PASSION FOR THE DARTS



WORKER

F10555



AK
HOMME

X.S.W

ML3D

AK-BLASTER MOD SHOP IS AN ONLINE SHOP AND WE MAKE PRODUCTS TO MODIFY AND CUSTOMIZE NERF BLASTER. WE OFFER WORKER MOD, F10555, MEN-GUN MOD, AK TACTICAL GEAR.XSW.ML3D, ARTIFACT, ETC BRAND PRODUCTS ON BLASTER MODDING. WE PROVIDE SERVICES ON CUSTOMIZE BLASTER WITH PARTS, 3D PRINTING AND PAINT WORKS. WE ORGANIZE BLASTER GAME ACTIVITIES AND NERF PARTY FOR KIDS. WE OFFER VENUE DESIGN, CUSTOMIZE INVITATION CARDS, HEALTHY FOODS AND CAKE, ORGANIZE NERF BATTLE GAME AND PHOTOGRAPHY SERVICES.

Disclaimer

Disclaimer:

Individual results may vary. Modding blasters is a hobby of ours, and in no way do we claim to be experts on the subject. We've written this manual for other enthusiasts who want to accomplish what we have with our blasters. However, due to legal reasons, we're unable to guarantee any results and the content in this manual should not be considered professional advice.

The use of this information and recommended products should be based on your own due diligence. You agree not to hold the authors and/or distributors of this manual liable for any success or failure of your endeavors that are directly or indirectly related to the purchase and use of our information, recommended products and services.



Make sure you have good knowledge on electric circuit and modding skill. Please read below instruction carefully and reference to online video on installing instruction.

INSTALLATION STEPS

Supplies Needed:

- Small Phillips Head Screwdriver
- Small Flat Head Screwdriver


Step 1:

Remove all the screw on the blaster and beware keeping the screws in safe area.




Step 2:

Remove all the screw on the upper halve, locate the magazine catch module and remove the screw as shown.

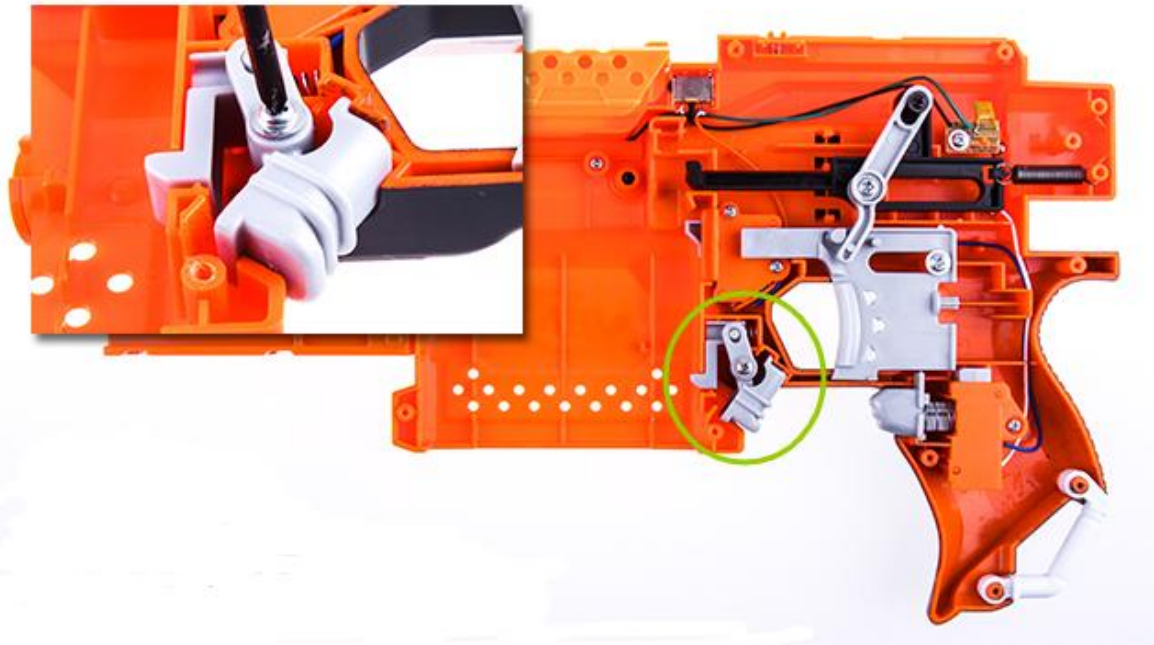


Step 3:

Pick up the magazine catch module in safe position.

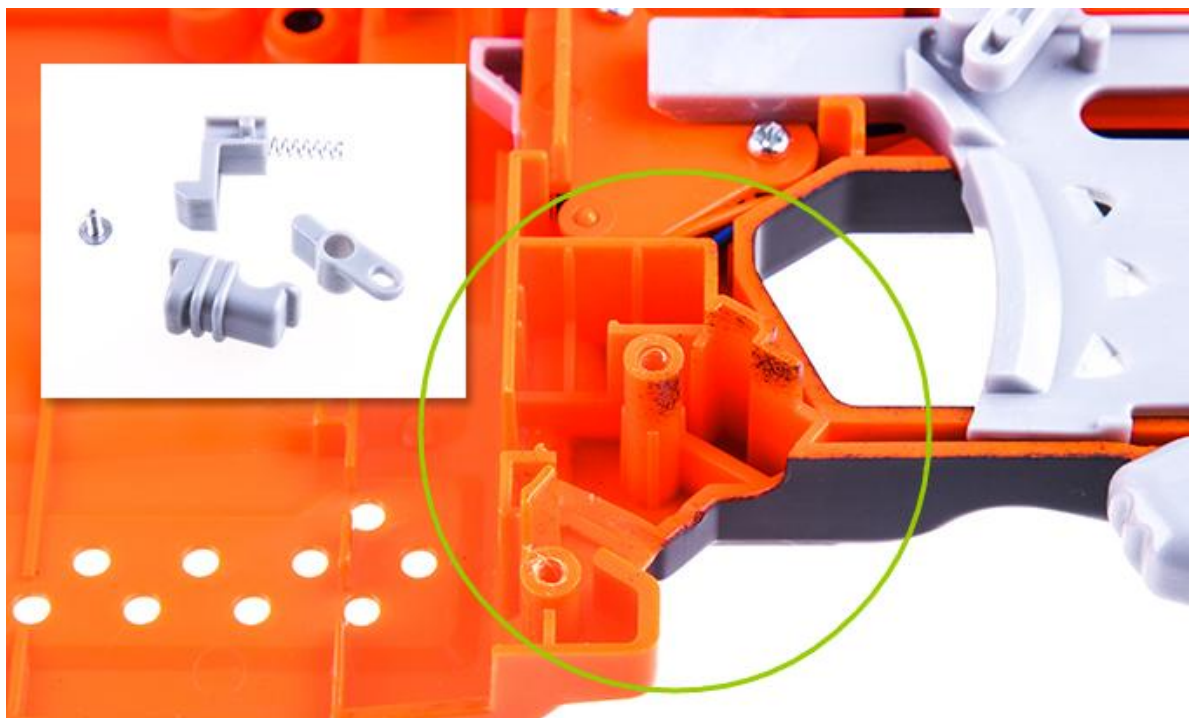

Step 4:


Pick the magazine catch piece and replace the spring coil with Worker MOD spring coil as include in the package. Install the catch back to the blaster.

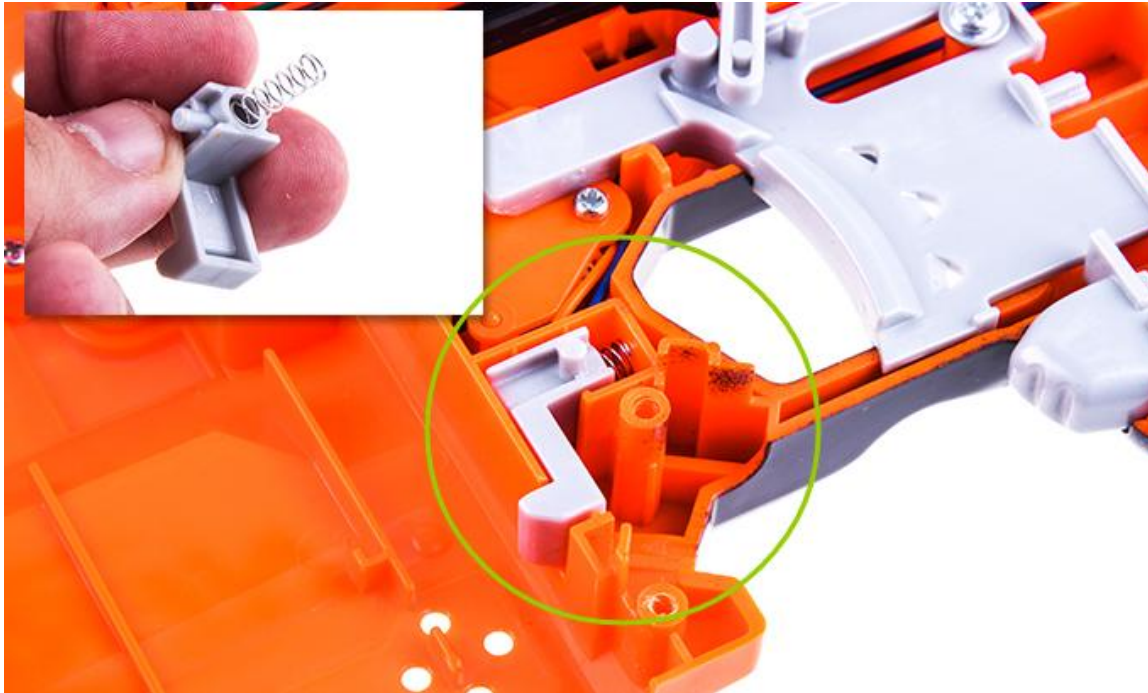**Step 5:**

Replace and install the push button by Worker MOD push button piece, fasten the screw and make sure the magazine catch module secure on the blaster. Cover the halve and fasten all the body screen back.



Step 6:

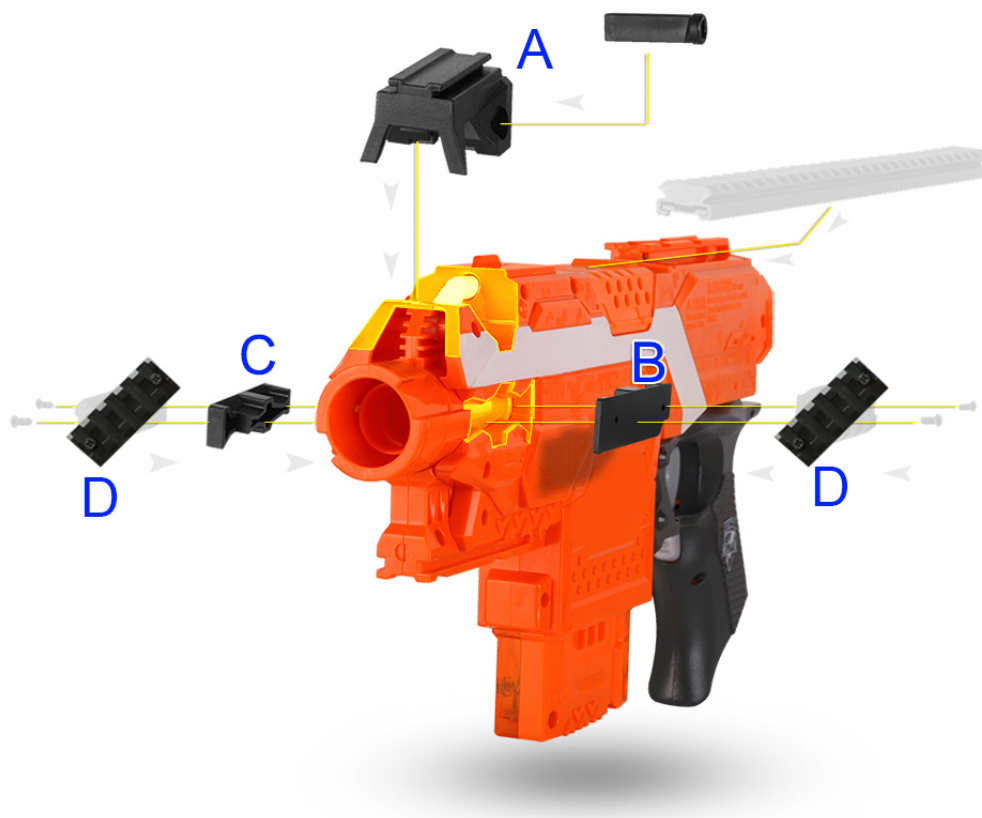

Step7:

Tactical 27.9cm Picatinny Rail Mount



Step 8:

Hold the Kriss Vector Housing, locate the rail mount on the top front body, slightly install and slide into Stryfe front bottom rail.



Step 9:

Push the Housing to the end of rail, check if complete install fitting the outer structure of Stryfe.




Step 10:


Locate the tail end of the parts, push and fit into Stryfe grip bottom as shown. Secure in position with the pin snap into the hold of the tail.




Step 11:

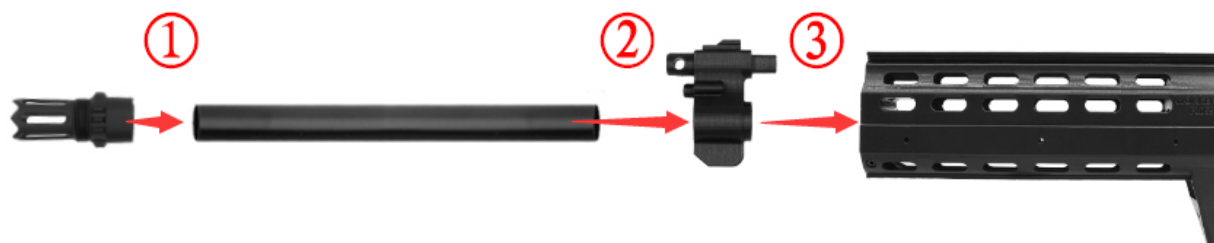

Step 12:

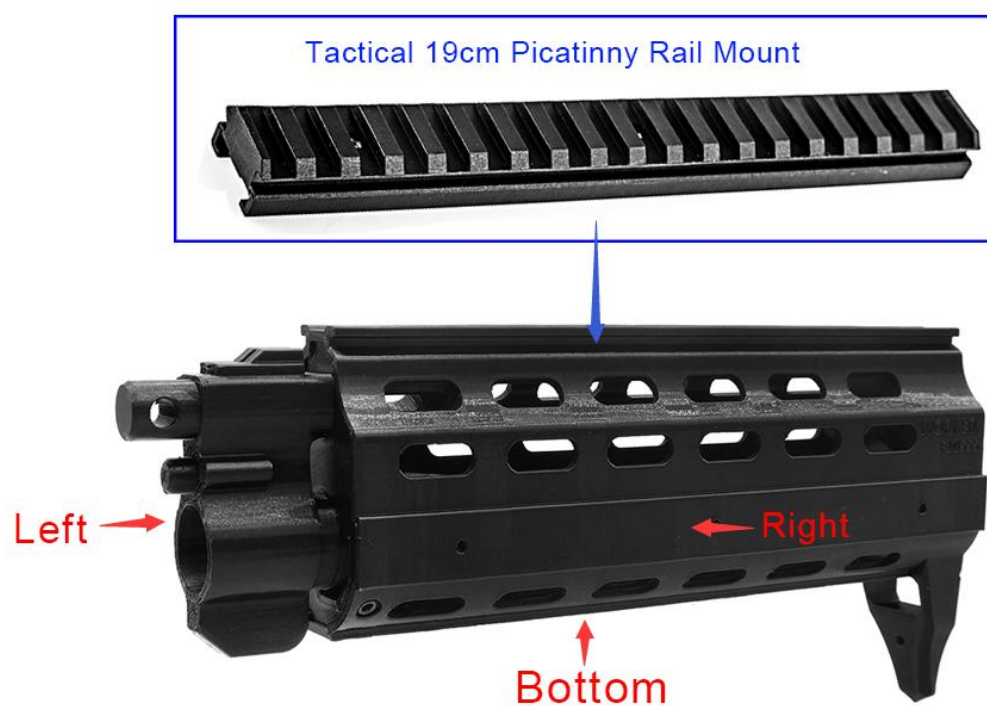

Step 12:

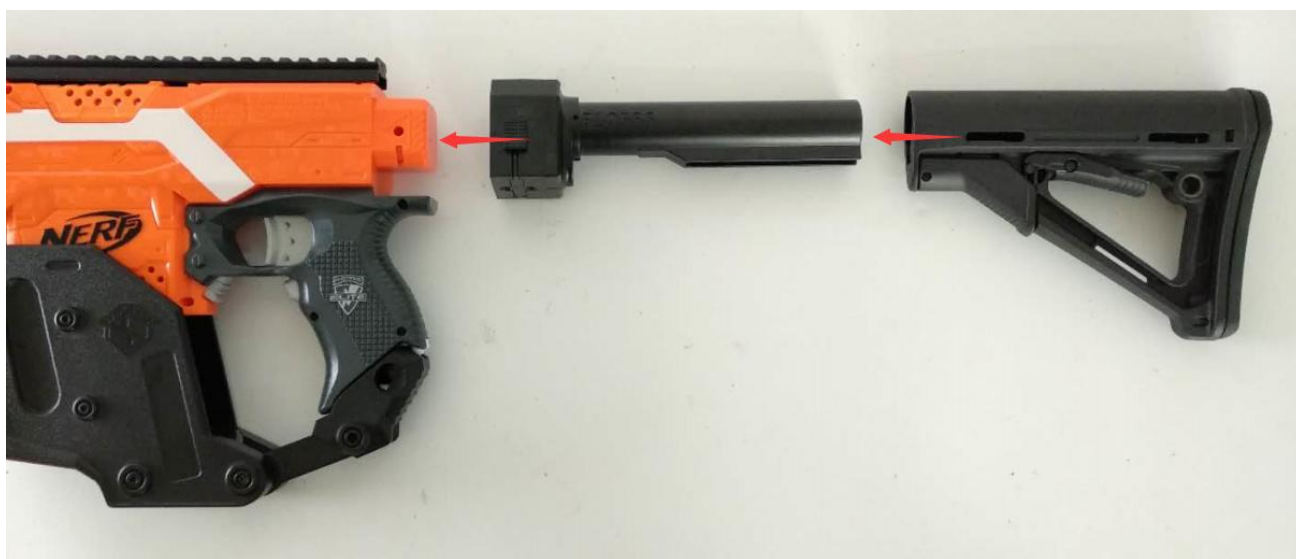

Step 13:

